


## Roman tub filler Relleno bañera romana

Model number / Número de modelo  
22 7008 \_ \_

Series / Serie  
**Guilloche**

3501 Challenger Street, Torrance, CA 90503  
TEL 310.371.8000 FAX 310.303.7999

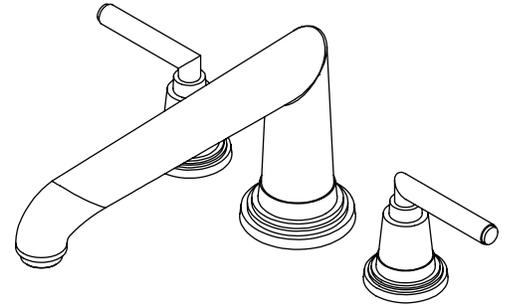


### Spout Rough / canalón áspera

NOTE: Hole size for the spout, handle trim, and handheld shower is a minimum of 1-1/4" and a maximum of 1-1/2".

NOTA: El tamaño del agujero de la boquilla, manija ajuste, y ducha de mano es un mínimo de 1-1 / 4 "y un máximo de 1-1 / 2".

1

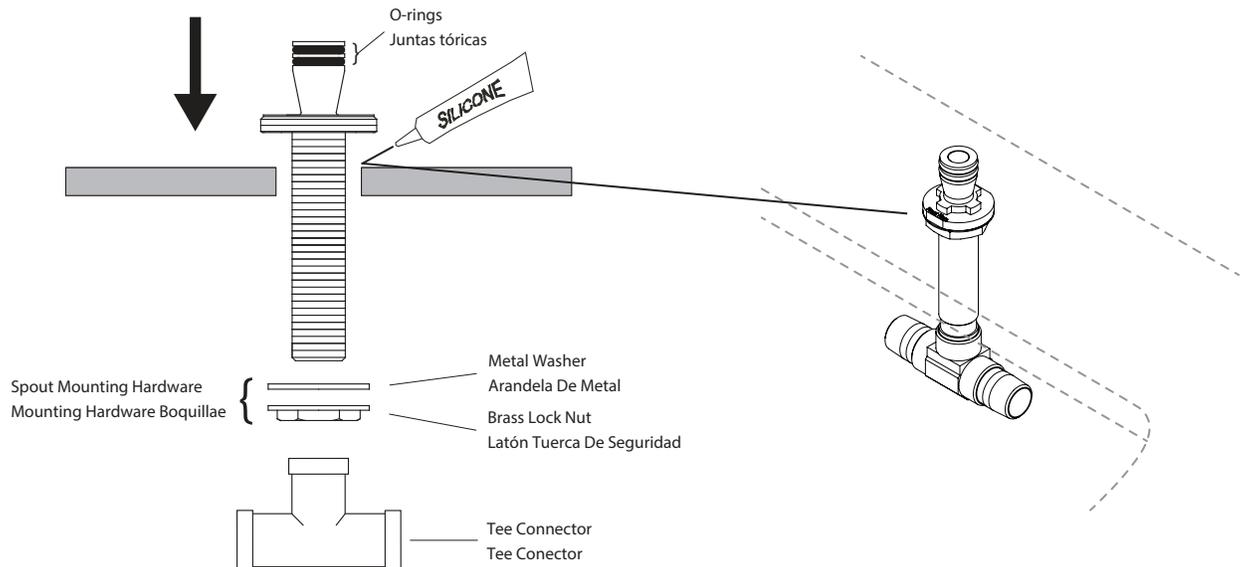

Hole size for the Spout and handle trim is minimum of 1-1/4" and maximum of 1-1/2".

Turn off HOT and COLD supply lines before beginning installation.

Remove tee connector and spout mounting hardware from spout shank. Apply a ring of silicone caulking around hole designated for spout. Do not use plumber's putty, which can damage the finish.

Find the "front here" mark, which is found on the base, and make sure that it is facing forward. Slip spout shank through deck top and re-attach the spout mounting hardware until secure.

Wipe away excess silicone with a paper towel.

Wrap the bottom threads with plumber's tape and thread the tee connector back onto spout shank.

Tamaño del agujero para el canalón y la manija de ajuste es mínimo de 1-1 / 4 "y un máximo de 1-1 / 2".



Apague las líneas de suministro caliente y fría antes de comenzar la instalación.

Retire camiseta conector y pico hardware de montaje del vástago del surtidor. Aplicar un anillo de masilla de silicona alrededor del agujero designado para surtidor. No use masilla de plomero, que pueden dañar el acabado.

Encontrar la marca "frente aquí", que se encuentra en la base, y asegúrese de que se enfrenta hacia el frente. Slip vástago del surtidor a través de la cubierta superior y vuelva a colocar las piezas de montaje del surtidor hasta que quede firme.

Limpie el exceso de silicona con una toalla de papel.

Envuelva las roscas inferiores con cinta de plomero y el hilo conector camiseta de nuevo en vástago del surtidor.

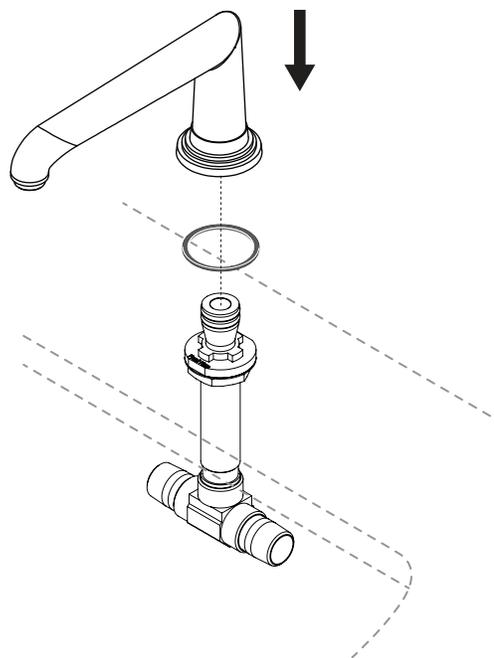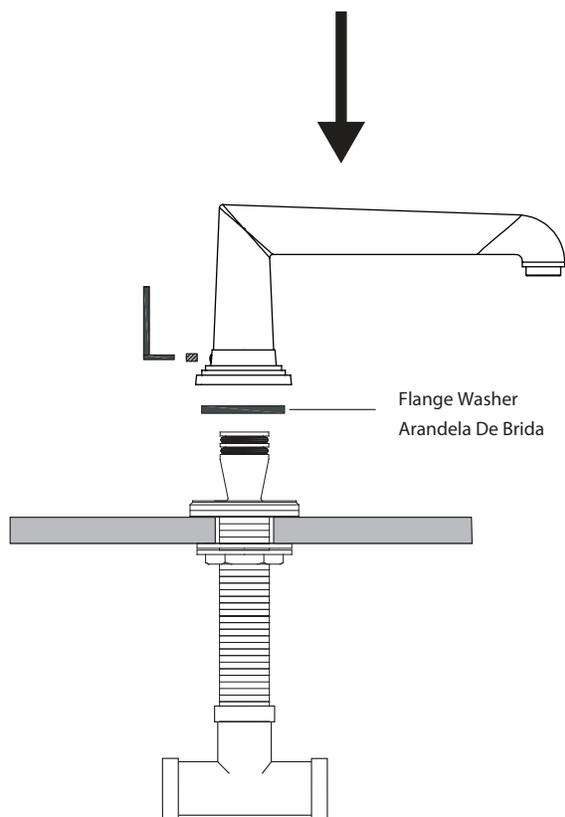

from the top of the deck, slip the spout with the flange washer onto the quick connect shank top.

Align the spout and tighten the set screw with the provided allen key.


Note: If trim comes later than the roughs, please keep the shank protector on the spout shank at all times to avoid damages to the unit.

desde la parte superior de la cubierta, deslice la boquilla con la arandela de brida en el vástago de conexión rápida arriba.

Alinee el surtidor y apriete el tornillo de fijación con la llave Allen suministrada.

Nota: Si el ajuste llega más tarde que los roughs, por favor, mantenga el protector de vástago en el vástago del surtidor en todo momento para evitar daños a la unidad.

3

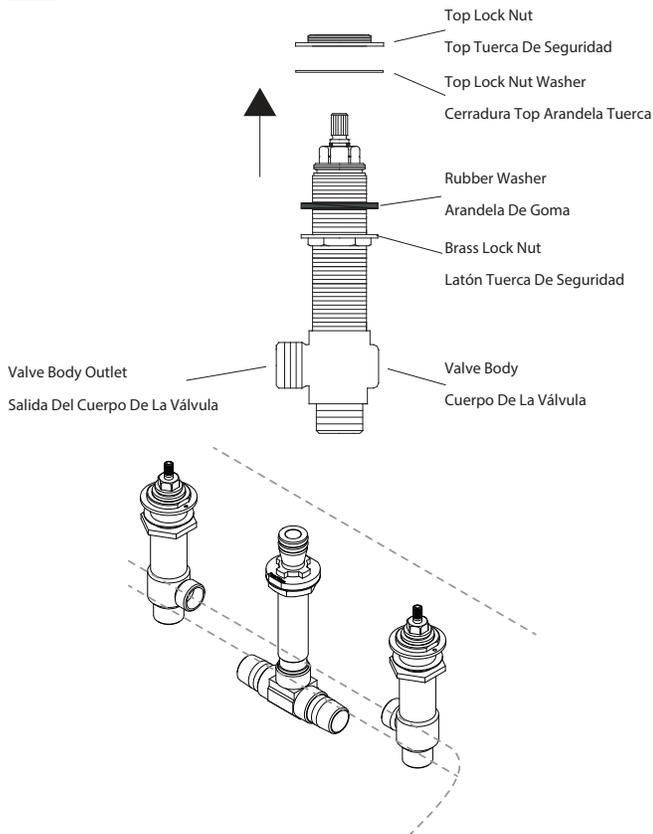

NOTE: Hot valve "Red" mounted to left side. Cold valve "Blue" to be mounted on right side.

Remove the top lock nut and top lock nut washer from the valve body.

Apply a ring of silicone around the handle hole on top of the deck.

Do not use plumber's putty, which can damage the finish.

While tightening the valve body into place, make sure to keep the position of the valve body outlet pointed toward the tee connector.

Slip the valve body into the proper handle hole from underneath the tub. Thread the top lock nut and top lock nut washer back onto the valve body and tighten down securely.

From underneath, tighten the brass lock nut securely.

NOTA: La válvula caliente "Rojo" montada en el lado izquierdo. Válvula de frío "azul" para ser montado en el lado derecho.

Retire la tuerca superior y superior arandela tuerca de bloqueo del cuerpo de la válvula.

Aplicar un anillo de silicona alrededor del agujero de la manija en la parte superior de la cubierta.


No use masilla de plomero, que puede dañar los acabados.

Mientras aprieta el cuerpo de la válvula en su lugar, asegúrese de mantener la posición de la salida del cuerpo de la válvula apuntando hacia el conector de salida.

Deslice el cuerpo de la válvula en el orificio adecuado mango de debajo de la bañera. Enrosque la tuerca de bloqueo superior y bloqueo superior arandela tuerca de nuevo en el cuerpo de la válvula y apriete firmemente.

Desde abajo, apriete la tuerca de seguridad de latón con seguridad.

4

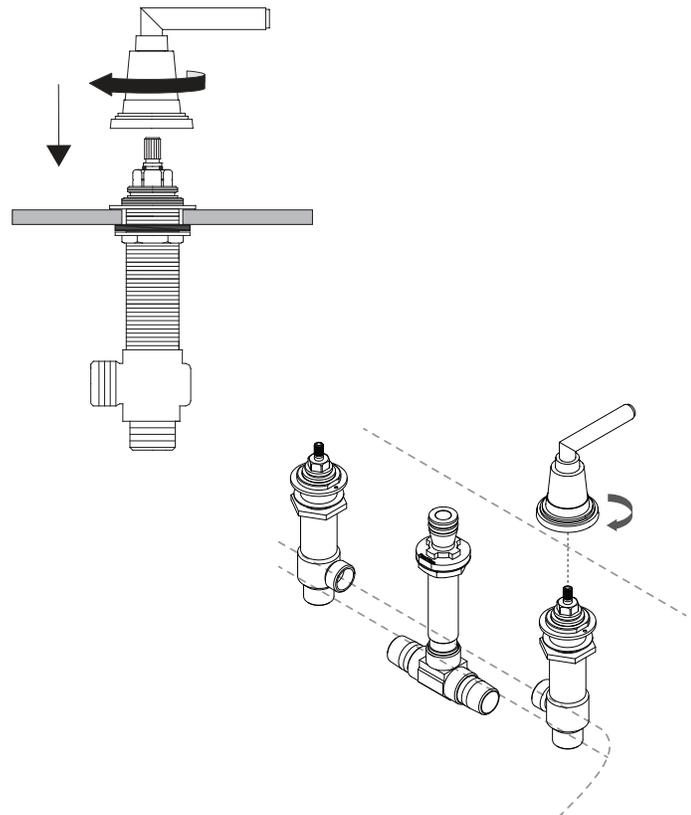

NOTE: In the "OFF" positions, the "Hot" handle lever (left) should be in the "9 o' clock" position, and the "Cold" handle lever (right) should be in the "3 o' clock" position. In the "ON" positions, the levers should both turn towards you, not away from you.


Fit the handle down onto the installed valve body making sure that the handle levers are in a parallel line with the spout.

Turn the escutcheon clockwise onto the valve body until tightened down securely.

NOTA: En las posiciones frente a la "caliente" palanca de empuña dura (izquierda) debe estar en la posición de "nueve", y el "frío" palanca de mango (derecha) debe estar en la posición de "tres". En los "en" posiciones de las palancas deben girar tanto hacia usted, no lejos de ti.


Coloque el mango hacia abajo sobre el cuerpo de la válvula instalada asegurándose de que las palancas de mango están en una línea paralela con el pico.

Gire el cuerpo de ajuste en sentido horario en el cuerpo de la válvula hasta endurecido de forma segura.

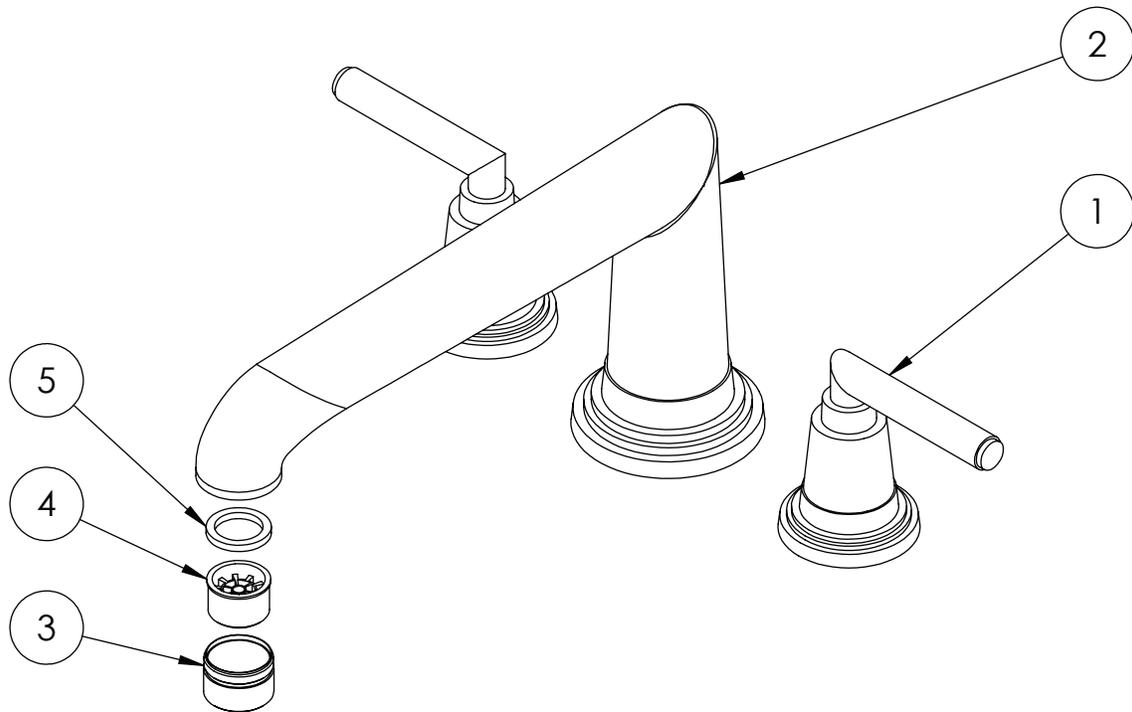

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	RT-GP	Roman Tub Lever	2
2	VPS-5GU00-U-1	Roman Tub Spout	1
3	P0255L	Aerator Housing	1
4	PM-355	Diffuser	1
5	PM-356	Washer	1

ARTÍCULO NO.	PARTE NÚMERO	DESCRIPCIÓN	CANT.
1	RT-GP	Bañera romana Palanca	2
2	VPS-5GU00-U-1	Bañera romana Boquilla	1
3	P0255L	aireador de Vivienda	1
4	PM-355	Difusor	1
5	PM-356	lavadora	1

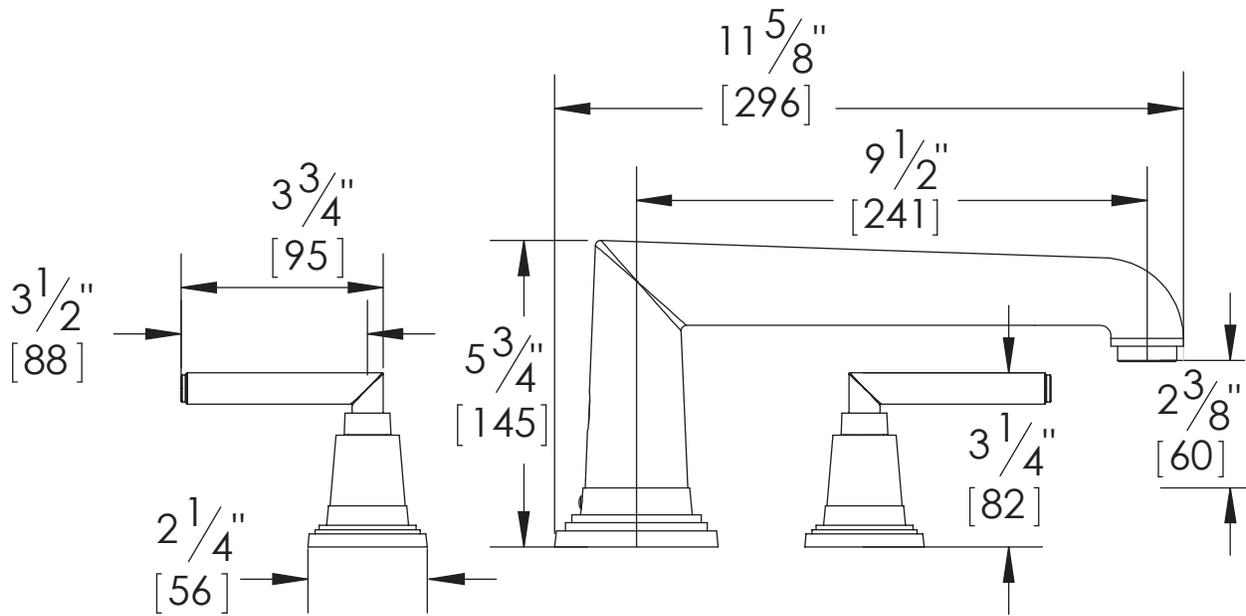

# VISSONI™

## FINISH CARE INFORMATION

**WARNING:** Do not clean your VISSONI product with ammonia (Window cleaner), bleach, soaps, acids, abrasives, harsh polishes, harsh cleaners, a coarse surfaced cloth, coarse sponge, or any type of scouring pad. Doing so may ruin your faucet finish and/or void the warranty.

Thank you for making VISSONI a part of your lifestyle and luxury spa experience. Our products have been created as works of enduring quality and sophisticated design. Luxurious finishes need proper care and attention, so in order to understand how to properly clean your distinctive luxury finish please refer to the finish care information below:

Your VISSONI product can be identified in one of two categories: clear coated finishes or non-clear coated finishes. Clear coated finishes are more scratch-sensitive and more reactant to harsh cleaning chemicals than non-clear coated finishes. Once you have identified the specific luxury finish of your VISSONI product, please follow the important corresponding care instructions.

## CLEAR COATED FINISHES

### Polished & Satin 24K (Rose) Gold:

The Karat mark states the percentage of pure gold -- 24K is 100 percent gold. As one of the Earth's most precious metals, gold is the most supple and malleable of all metals. Gold-plated faucets scratch easily. To clean, wipe down with a dry soft cloth after each use. Gold surfaces should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Matte Black & Antique Bronze:

Antique bronze simulates the antiquity of Old-World craftsmanship with a golden base color and a blend of dark undertones. To clean, wipe down with a dry soft cloth after each use. They should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Bright Victorian Bronze & Oil Rubbed Bronze:

Oil-rubbed bronze simulates the antiquity of Old-World craftsmanship with its warm, dark brown color and copper undertones. To clean, wipe down with a dry soft cloth after each use. They should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

## NON-CLEAR COATED FINISHES

### Polished Chrome :

Chrome plating is extremely reflective, with a rich bluish luster. To clean, wipe down with a dry soft cloth after each use. A non-abrasive all-metal cleaner can then be applied to restore the shine. The surface can also be coated with a thin layer of non-abrasive carnauba wax or liquid car wax. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Platinum & Satin Platinum:

Platinum is the most precious of white metals and is over 20 times rarer than gold. It is also very durable and resists tarnishing. To clean, wipe down with a dry soft cloth after each use. A non-abrasive all-metal cleaner can then be applied to restore the shine. The surface can also be coated with a thin layer of non-abrasive carnauba wax or liquid car wax. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

If you may have any further questions, comments, or concerns please write to us at [www.info@vissoni.com](mailto:www.info@vissoni.com).

# V I S S O N I <sup>TM</sup>

## LIFETIME LIMITED WARRANTY

VISSONI is committed to enhancing your bathroom experience by creating luxury products that will provide enduring satisfaction. Every effort has been made to satisfy the highest standards of design and production, to create lasting peace of mind for our customers. We provide the following limited warranties on our products:

## LENGTH OF WARRANTY & WHO IS COVERED BY OUR WARRANTY

This warranty extends to the original consumer purchaser only and extends for as long as the original purchaser owns the product and the home in which the product is installed.

## WHAT IS COVERED BY OUR WARRANTY

### Finishes:

Polished chrome, platinum, and satin platinum finishes carry a lifetime limited warranty against all manufacturer's defects and tarnish. 24k polished (rose) gold, and 24k satin (rose) gold finishes carry a five (5) year limited warranty against all manufacturer's defects and tarnish.

Antique bronze, bright victorian bronze, matte black, and oil-rubbed bronze finishes carry a five (5) year Limited Warranty against all manufacturer's defects and tarnish. There is no warranty on living finishes.

### Mechanical:

A Lifetime Limited Warranty is provided on parts to be free from failure related to defects in materials and workmanship. Vissoni cartridges carry a Five (5) Year Limited Warranty against manufacturer's defects.

## EXCLUSIONS AND LIMITATIONS OF WARRANTY

This warranty does not cover:

1. Damage due to negligence, accident, abuse, improper installation, or improper maintenance such as, but not limited to: heat from soldering during installation, the use of plumber's putty, damage from tools used during installation, the use or exposure to chemicals or cleaning products either abrasive or non-abrasive, or the use of any cleaning tool or product other than a soft, clean cloth. Reverse osmosis may also shorten the life of the finish.
2. Changes in the finish or in the product due to normal wear or aging does not cover any products or parts which have been altered or used in a manner not typical for the product.
3. Loss, damages, or expense, incidental or consequential whatsoever, originating from the purchase, installation, use, repair, failure, or replacement of any VISSONI product or part, allowed by law.
4. Commercial and/or Industrial installations and use of the product.
5. This warranty does not include labor, travel charges, or any costs incurred for repair, removal, installation, servicing, diagnosing, or handling of either defective or replacement parts.
6. Damage or deterioration caused by environmental impacts.

The product or components of the covered product will be repaired, refinished, or replaced, at the sole discretion of VISSONI. VISSONI reserves the right to examine the product claimed defective prior to any warranty claim being accepted or processed, at its sole discretion. This warranty gives you specific legal rights and you may have other rights which may vary from state to state.

## TO OBTAIN WARRANTY SERVICE

Please read 'WHAT IS COVERED BY OUR WARRANTY' and 'EXCLUSIONS AND LIMITATIONS OF WARRANTY' sections to understand what is and what is not covered. Please have ready the proof of purchase (original sales receipt), description of the problem, and carefully package the product or defective part with postage prepaid. Then, please contact your local VISSONI Showroom or write to VISSONI Customer Services.

If you may have any further questions, comments, or concerns please write to us at [www.info@vissoni.com](mailto:www.info@vissoni.com).