

**TRIM - Wall mount widespread lavatory - 8½" & 10"**  
**TRIM - Soporte de pared generalizado lavabo - 8½" & 10"**


Model number / Número de modelo

12 2708 \_\_ / 12 2710 \_\_

11 2708 \_\_ / 11 2710 \_\_

Series / Serie

**Esconte / Priani**

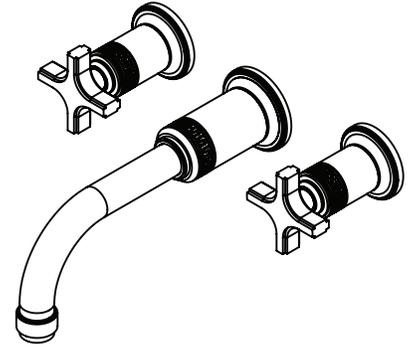


3501 Challenger Street, Torrance, CA 90503  
TEL 310.371.8000 FAX 310.303.7999

**Rough / Áspero**

Note: Hole size for the spout and handles are minimum of 1-5/8" and maximum of 1-3/4".  
Nota: El tamaño del agujero de la boquilla y las manijas son mínimo de 1-5/8" y un máximo de 1-3/4".

1

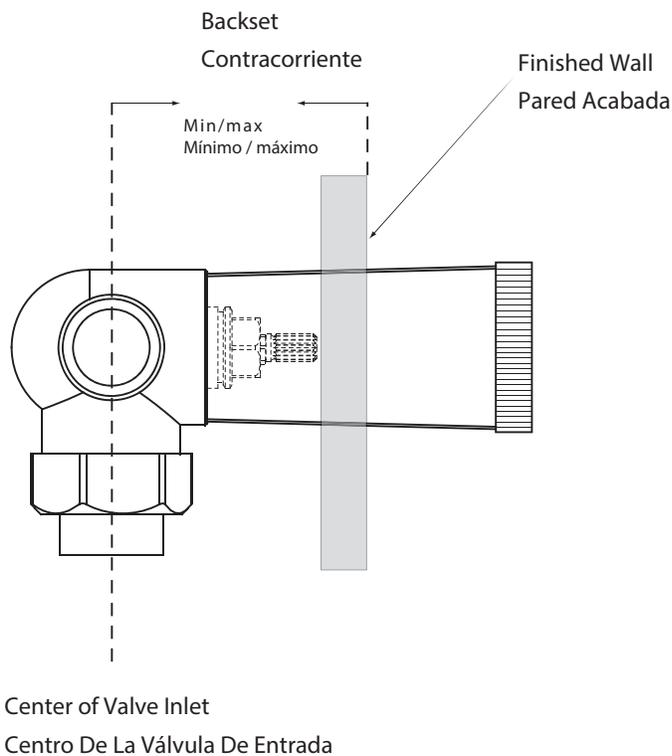

**WARNING:** Keep the plastic guard on the top of the valve at ALL times to prevent any damage to the valve or cartridge. Failure to do so will void the warranty of the valve.

Note: Where tile construction is planned for the finished walls, allow for extra thickness dimensions when roughing in the valves.

Determine where the finished wall will be. This measurement is necessary to accurately plumb in the valve.

Install the valve with the plastic guard into the wall making sure that the measurement between the center of the valve inlet and the outside of the finish wall is between 2-1/2" and 3". This measurement is called the backset.


**ADVERTENCIA:** Mantenga el protector de plástico en la parte superior de la válvula en todo momento para evitar cualquier daño a la válvula o cartucho. De no hacerlo, se anulará la garantía de la válvula.

Nota: donde se planea la construcción del azulejo para las paredes acabadas, permitir dimensiones de espesor extra cuando desbaste en las válvulas.

Determinar dónde la pared acabada será. esta medida es necesaria para sondear con precisión en la válvula.

Instalar la válvula con el protector de plástico en la pared asegurándose de que la medida entre el centro de la entrada de la válvula y el exterior de la pared de terminación es de entre 2-1 / 2" y 3". esta medida se llama el contratiempo. Consulte la página siguiente para mediciones retrasadas en todos los mangos.

2

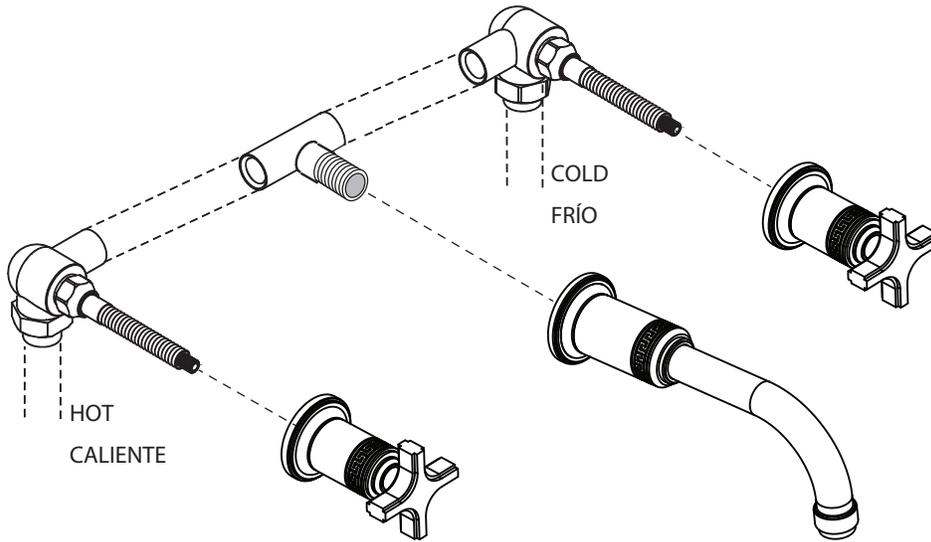

Using 1/2" IPS, connect corner valves to the spout base at the desired spread.


Again, allow no more than 1-5/8" minimum and 1-3/4" maximum diameter holes for the spout and handles.

El uso de 1/2 "IPS, conectar válvulas de esquina a la base del surtidor en la difusión deseada.

Una vez más, permitirá no más de 1-5 / 8 agujeros de diámetro máximos para el surtidor y las manijas "1-3 / 4 y mínimo".

Spout

3

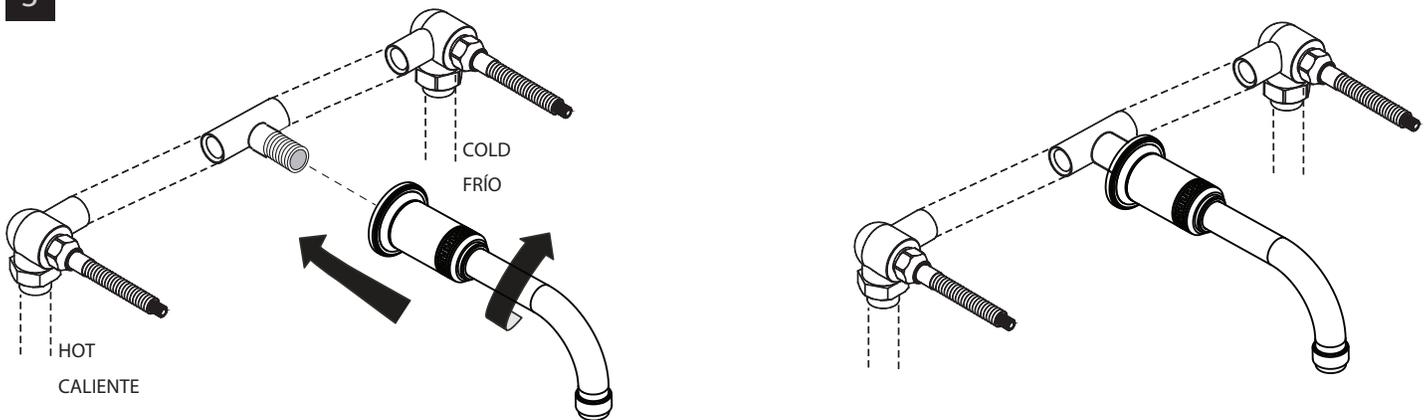

Note: The length of threaded pipe coming out from the finish wall should be no longer than 1/2".

Wrap the pipe threading for the spout with Teflon tape. then thread the spout onto the pipe until it is secured with the spout facing downward.

WARNING: Do not use excessive force when threading the spout.

Nota: La longitud del tubo roscado que sale de la pared final debe ser de no más de 1/2 ".

Envuelva el roscado de tubos para la boquilla con Teflón tape. then enrosque el surtidor en el tubo hasta que se asegura con el pico hacia abajo.

ADVERTENCIA: No use fuerza excesiva al enhebrar la boquilla.

4

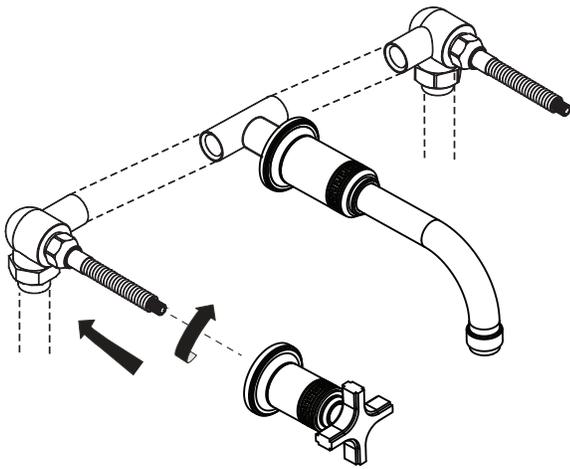


Diagram A / Diagrama A



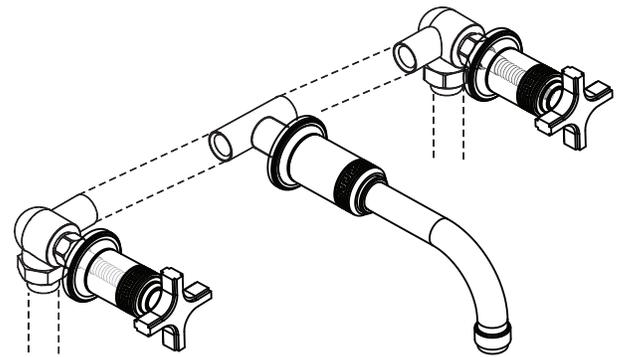


Diagram B / Diagrama B

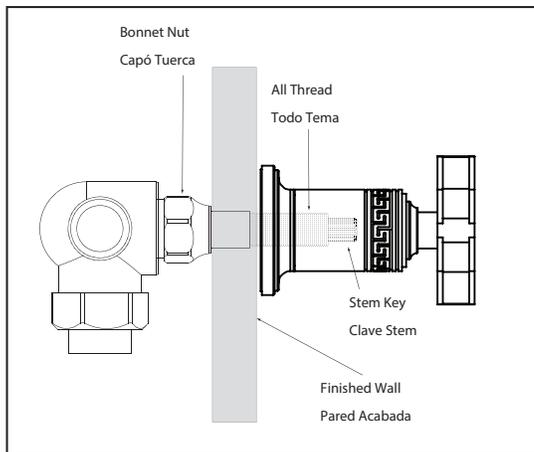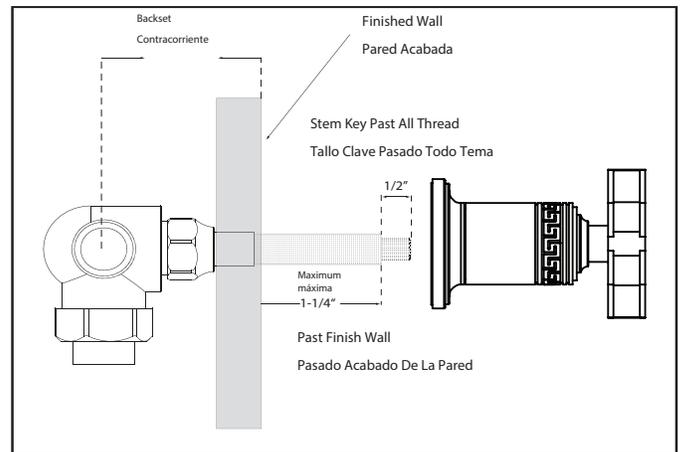

Step 1- Take the plastic guard off the valve.

Step 2- Thread the bonnet nut, all thread, and stem key onto the valve and lightly tighten assembly with a 1" plumber's socket wrench.

Step 3- Make a mark on the all thread that is a maximum distance from the finish wall of 1-1/4".

Step 4- Un-thread the bonnet nut, all thread and stem key from the valve .

Step 5- Using a hacksaw, cut the excess at the mark on the all thread. Re-insert the stem key into the assembly. From the end of the newly cut all thread, measure a distance of 1/2" on the stem key and make a mark. Cut the excess at the mark on the stem key. See Diagram B.

Step 6- Re-thread the bonnet nut, all thread and stem key back onto the valve and snugly tighten assembly with a 1" plumber's socket wrench. See Diagram B.

Paso 1- Tome el protector de plástico de la válvula.


Paso 2- Pase la tuerca tapa, todo el hilo y la clave del tallo en la válvula y apriete ligeramente montaje con llave de tubo de un "de plomero 1.

Paso 3- Haga una marca en el todo hilo que es una distancia máxima de la pared final de 1-1 / 4 "

Paso 4- Un-enrosque la tuerca tapa, todo el hilo y la llave de la válvula del vástago.

Paso 5- Usando una sierra para metales, corte el exceso en la marca en el todo hilo. Vuelva a introducir la clave vástago en la asamblea. Desde el final de la recién cortada toda hilo medir una distancia de 1/2 "en la tecla de tallo y hacer una marca. Cortar el exceso en la marca en la tecla tallo. Ver Diagrama B en la página .


Paso 6- Vuelva a enhebrar la tuerca tapa, todo el hilo y la clave se derivan de nuevo en la válvula y apriete ajustadamente montaje con zócalo de un "de plomero 1 wrench.See Diagrama B.

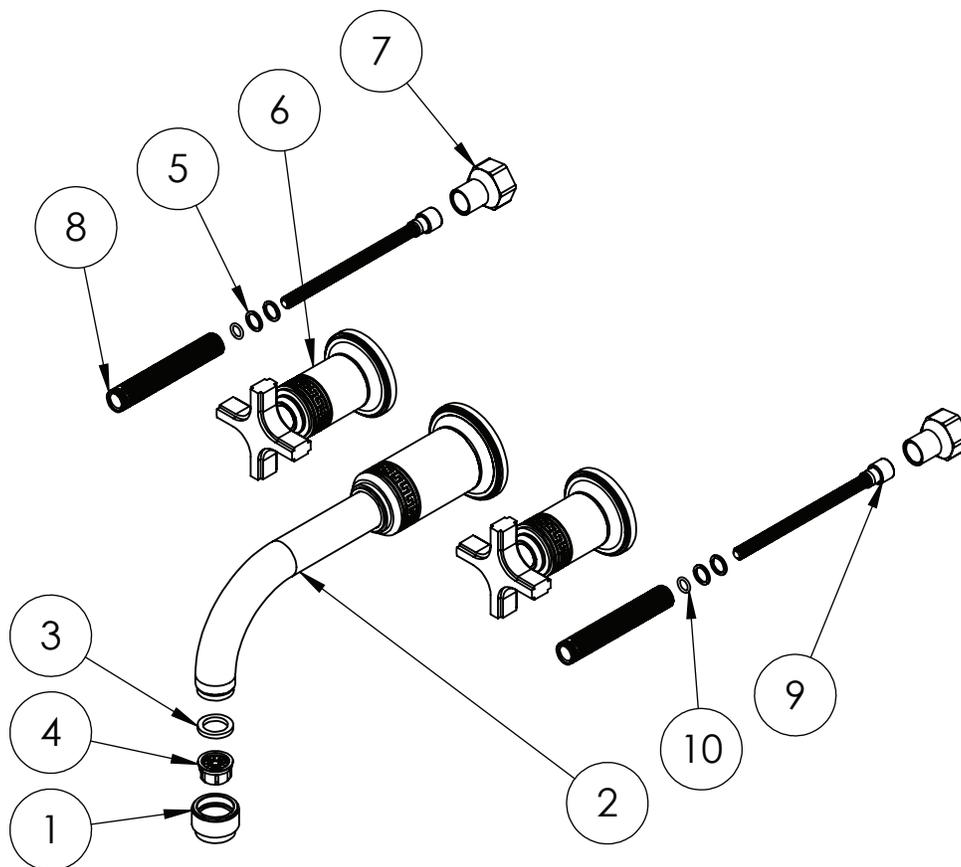


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	VP0261	Lip	1
2	PS-4DX00-U PS-4D00-U	8 1/2" Wall Maount Spout 10" Wall Maount Spout	1
3	PM-306	Washer	1
4	PM-455	Diffuser	1
5	PM-020	Teflon Washer	4
6	ES	Widespread Handle	2
7	PM-956	Nut	2
8	PM-955	All Thread	2
9	PM-007-1	20T Broach Extension	2
10	PM-017	O-Ring	2

ARTÍCULO NO.	PARTE NÚMERO	DESCRIPCIÓN	CANT.
1	VP0261	labio	1
2	PS-4DX00-U PS-4D00-U	8 1/2" Wall Maount Boquilla 10" Pared Maount Boquilla	1
3	PM-306	Lavadora	1
4	PM-455	Difusor	1
5	PM-020	Lavadora de teflón	4
6	ES	Mango generalizada	2
7	PM-956	Nuez	2
8	PM-955	Todos roscan	2
9	PM-007-1	20T brocha de Extensión	2
10	PM-017	O-Ring	2

Model number / Número de modelo  
12 2708 \_\_

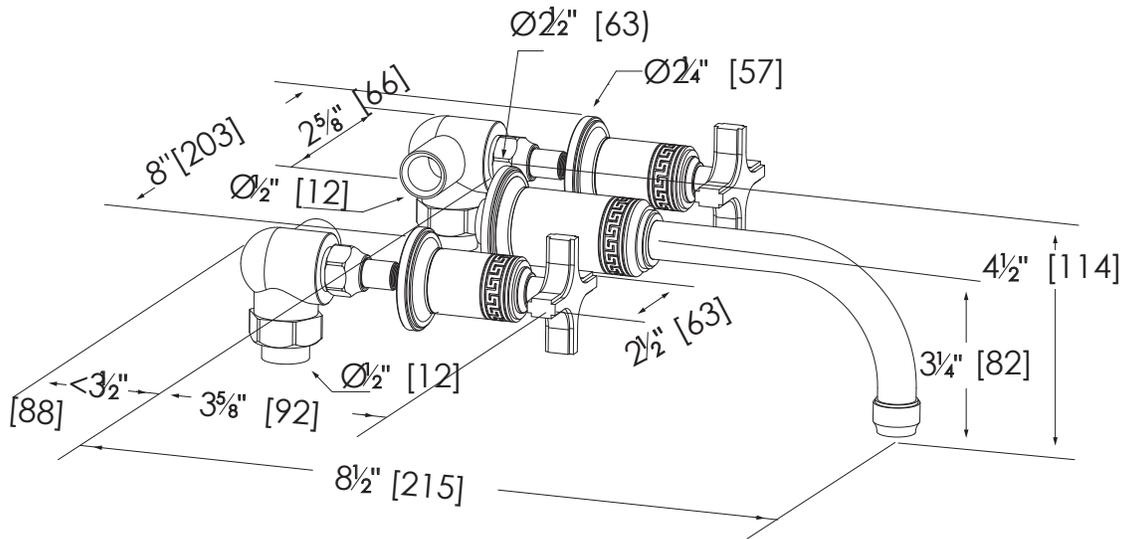

Model number / Número de modelo  
12 2710 \_\_

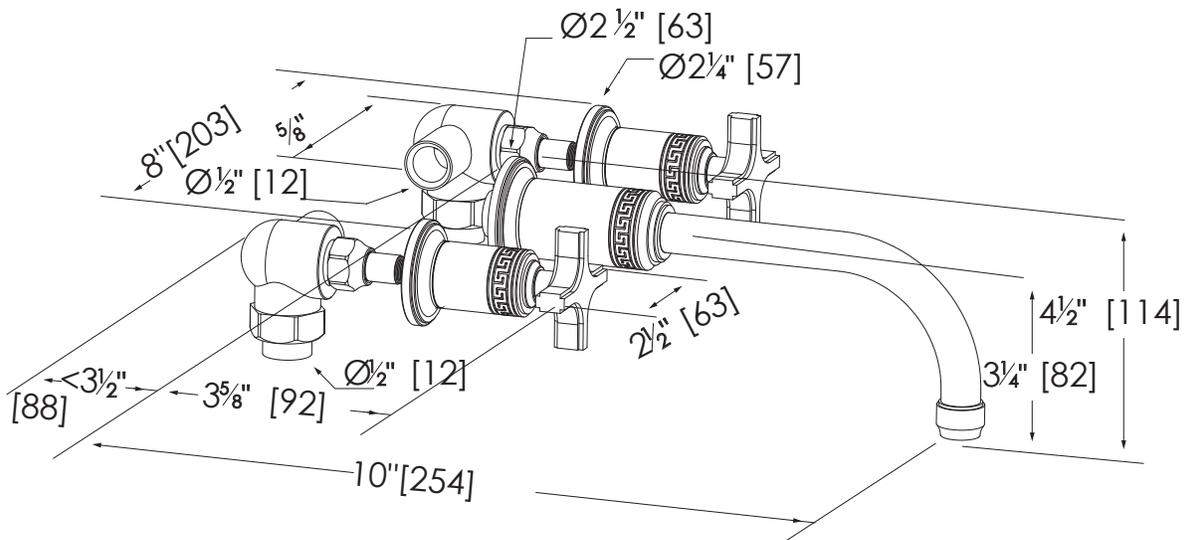

# V I S S O N I <sup>TM</sup>

## FINISH CARE INFORMATION

**WARNING:** Do not clean your VISSONI product with ammonia (Window cleaner), bleach, soaps, acids, abrasives, harsh polishes, harsh cleaners, a coarse surfaced cloth, coarse sponge, or any type of scouring pad. Doing so may ruin your faucet finish and/or void the warranty.

Thank you for making VISSONI a part of your lifestyle and luxury spa experience. Our products have been created as works of enduring quality and sophisticated design. Luxurious finishes need proper care and attention, so in order to understand how to properly clean your distinctive luxury finish please refer to the finish care information below:

Your VISSONI product can be identified in one of two categories: clear coated finishes or non-clear coated finishes. Clear coated finishes are more scratch-sensitive and more reactant to harsh cleaning chemicals than non-clear coated finishes. Once you have identified the specific luxury finish of your VISSONI product, please follow the important corresponding care instructions.

## CLEAR COATED FINISHES

### Polished & Satin 24K (Rose) Gold:

The Karat mark states the percentage of pure gold -- 24K is 100 percent gold. As one of the Earth's most precious metals, gold is the most supple and malleable of all metals. Gold-plated faucets scratch easily. To clean, wipe down with a dry soft cloth after each use. Gold surfaces should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Matte Black & Antique Bronze:

Antique bronze simulates the antiquity of Old-World craftsmanship with a golden base color and a blend of dark undertones. To clean, wipe down with a dry soft cloth after each use. They should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Bright Victorian Bronze & Oil Rubbed Bronze:

Oil-rubbed bronze simulates the antiquity of Old-World craftsmanship with its warm, dark brown color and copper undertones. To clean, wipe down with a dry soft cloth after each use. They should be coated with a thin layer of non-abrasive carnauba wax or liquid car wax up to 3 or 4 times per year. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

## NON-CLEAR COATED FINISHES

### Polished Chrome :

Chrome plating is extremely reflective, with a rich bluish luster. To clean, wipe down with a dry soft cloth after each use. A non-abrasive all-metal cleaner can then be applied to restore the shine. The surface can also be coated with a thin layer of non-abrasive carnauba wax or liquid car wax. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

### Platinum & Satin Platinum:

Platinum is the most precious of white metals and is over 20 times rarer than gold. It is also very durable and resists tarnishing. To clean, wipe down with a dry soft cloth after each use. A non-abrasive all-metal cleaner can then be applied to restore the shine. The surface can also be coated with a thin layer of non-abrasive carnauba wax or liquid car wax. This will prevent water spotting and water deposit buildup. We recommend using VISSONI's Polish which has been formulated to clean and seal, leaving behind a protective coating that will resist tarnishing and improve water repellency.

If you may have any further questions, comments, or concerns please write to us at [www.info@vissoni.com](mailto:www.info@vissoni.com).

# V I S S O N I <sup>TM</sup>

## LIFETIME LIMITED WARRANTY

VISSONI is committed to enhancing your bathroom experience by creating luxury products that will provide enduring satisfaction. Every effort has been made to satisfy the highest standards of design and production, to create lasting peace of mind for our customers. We provide the following limited warranties on our products:

## LENGTH OF WARRANTY & WHO IS COVERED BY OUR WARRANTY

This warranty extends to the original consumer purchaser only and extends for as long as the original purchaser owns the product and the home in which the product is installed.

## WHAT IS COVERED BY OUR WARRANTY

### Finishes:

Polished chrome, platinum, and satin platinum finishes carry a lifetime limited warranty against all manufacturer's defects and tarnish. 24k polished (rose) gold, and 24k satin (rose) gold finishes carry a five (5) year limited warranty against all manufacturer's defects and tarnish.

Antique bronze, bright victorian bronze, matte black, and oil-rubbed bronze finishes carry a five (5) year Limited Warranty against all manufacturer's defects and tarnish. There is no warranty on living finishes.

### Mechanical:

A Lifetime Limited Warranty is provided on parts to be free from failure related to defects in materials and workmanship. Vissoni cartridges carry a Five (5) Year Limited Warranty against manufacturer's defects.

## EXCLUSIONS AND LIMITATIONS OF WARRANTY

This warranty does not cover:

1. Damage due to negligence, accident, abuse, improper installation, or improper maintenance such as, but not limited to: heat from soldering during installation, the use of plumber's putty, damage from tools used during installation, the use or exposure to chemicals or cleaning products either abrasive or non-abrasive, or the use of any cleaning tool or product other than a soft, clean cloth. Reverse osmosis may also shorten the life of the finish.
2. Changes in the finish or in the product due to normal wear or aging does not cover any products or parts which have been altered or used in a manner not typical for the product.
3. Loss, damages, or expense, incidental or consequential whatsoever, originating from the purchase, installation, use, repair, failure, or replacement of any VISSONI product or part, allowed by law.
4. Commercial and/or Industrial installations and use of the product.
5. This warranty does not include labor, travel charges, or any costs incurred for repair, removal, installation, servicing, diagnosing, or handling of either defective or replacement parts.
6. Damage or deterioration caused by environmental impacts.

The product or components of the covered product will be repaired, refinished, or replaced, at the sole discretion of VISSONI. VISSONI reserves the right to examine the product claimed defective prior to any warranty claim being accepted or processed, at its sole discretion. This warranty gives you specific legal rights and you may have other rights which may vary from state to state.

## TO OBTAIN WARRANTY SERVICE

Please read 'WHAT IS COVERED BY OUR WARRANTY' and 'EXCLUSIONS AND LIMITATIONS OF WARRANTY' sections to understand what is and what is not covered. Please have ready the proof of purchase (original sales receipt), description of the problem, and carefully package the product or defective part with postage prepaid. Then, please contact your local VISSONI Showroom or write to VISSONI Customer Services.

If you may have any further questions, comments, or concerns please write to us at [www.info@vissoni.com](mailto:www.info@vissoni.com).